


ZH-6152XL-SL

RECESS MOUNTED FLUSH VALVE FOR USE WITH SLUICE SINKS



Option: Mount button on front of sluice cabinet

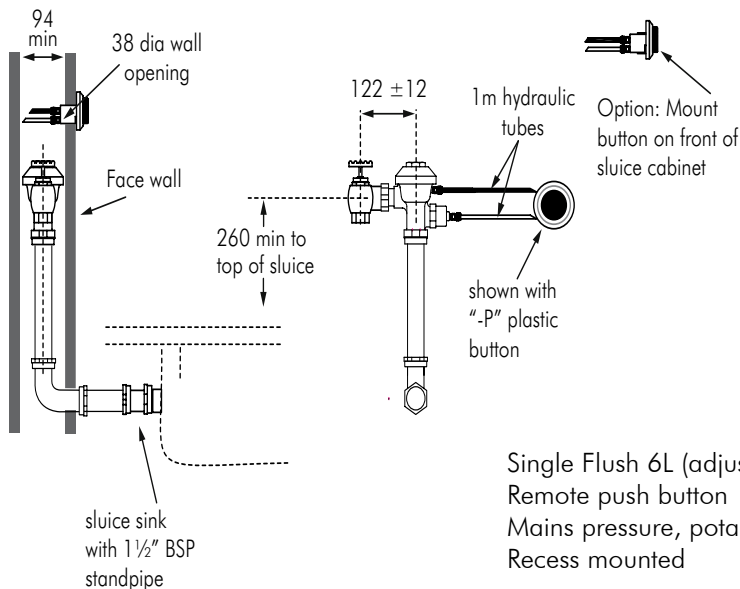

Single Flush 6L (adjustable)
 Remote push button
 Mains pressure, potable supply
 Recess mounted

DESCRIPTION

Zurn Model ZH-6152XL-SL flush valve is a hydraulically actuated mains pressure sluice sink flushing valve with an approved vacuum breaker allowing direct connection to potable water supply without any additional backflow protection. The standard valve is pre-set to deliver a 6L flush and has achieved the distinction of Australian Standards Watermark approval and WELS 1 Star rating. Valve upgradable to 4.5L flushing should regulations permit.

Pipe sizing is critical to correct valve operation and should be completed by a suitably qualified person. Where potable supply is not sufficient for flushing, a non-potable sluice sink valve (tank fed) is also available - refer ZH-6152L-SL Technical Data Sheet

Mount valve in appropriately sized duct space (see drawing above). 342mm x 342mm stainless steel access panel available should full duct access not be available.

Flow rings supplied with the valve allow the installer to increase the flush volume to either 9 or 12 litres if required (WELS 0 Star rated).

In order to comply with approvals is not possible to remote mount this valve and extend any pipework.

SPECIFICATION

Suitable for connection to bottom entry sluice sinks.
Minimum Pressure: 150kPa
Maximum Pressure: 500kPa
Flow Rate: 90L/min
Inlet Connection: 25mm BSP
Flush Volume: 6L

MODELS

ZH-6152XL-SL-M - Standard valve with 1" metal button.
ZH-6152XL-SL-P - As above but with 2" plastic button.

ACCESSORIES

ZA - 342 x 342 access panel & frame.
ZA-H - As above but with 38mm hole punched in panel for button mounting.



Auckland (Head Office)
 20 Carr Rd, Three Kings
 Auckland 1042
 P: 09 624 1115
 F: 09 624 1110
 E: sales@macdonaldindustries.co.nz

Wellington
 P: 04 569 8033
 F: 04 569 8066

Christchurch
 P: 03 348 2356
 F: 03 348 2376